







UL RECOGNIZED RECEPTACLE  
 POLARIZED FOR 48 VOLT AND  
 45 AMP CONTACTS FOR 10 GA WIRE  
 FOR USE ON INFORMATION TECHNOLOGY  
 EQUIPMENT.

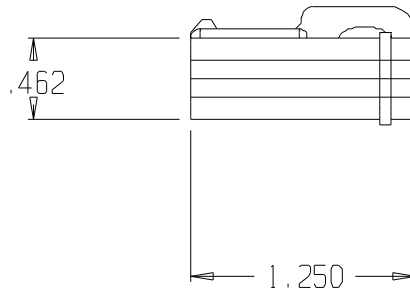

CONTACT CAT. NO. BS1014



EAD FILE NO:2000100410

UNLESS OTHERWISE SPECIFIED DIMENSIONS  
 ARE IN INCHES. (MM) TOLERANCES ARE  
 FRACTIONS DECIMALS ANGLES



W. T. STOREY INC.  
 DALMATIA, PA.

REVISIONS				MATERIAL		PART NAME:	
				00	+0.25	[.00] ± .01	<b>CABLE CONNECTOR</b> <b>48 V, 45 A, 10 GA</b>
				000	+0.127	[.000] ± .005	
						[.0000] ± .0005	
				HEAT TREAT		SCALE: J-1	SIZE: A
				LEXAN 94D		DRAWN BY: D.J.G.	
A	VERIFIED DIMENSIONS	10-4-01	EJR	PART NO. <b>48CA45US</b>		DATE: 10-4-2000	ISSUE <b>2</b>
REV	DESCRIPTION	DATE	APPROVED	DWG. NO. 200010041D		© 2000	FILE:
				00 NOT SCALE DRAWING			