



ASSEMBLY INSTRUCTIONS

Power Block Connector

W.T. Storey Inc.
866-355-0100
www.wtstorey.com

Part Numbers:	24LC30L	24LC45L	24LC65L
	48LC30L	48LC45L	48LC65L

*To minimize problems during the assembly
and for ease of alignment,
the following procedures should be followed exactly.*


Recommended Installation Tooling

- #2 Phillips screwdriver
- 5/16" hex bit socket
- Torque wrench to 275 inch-pounds (22.9 foot pounds)
- Wire cutter
- Wire Jacket Stripper
- Wire Insulation Stripper


*Accepts input wire
from size
6 GA "B" stranding
to
4/0 GA "O" stranding*

Wire Preparation

- 1.) Make certain the cable end is cut squarely.
- 2.) If the cable is a jacketed pair, then strip the jacket back 2 1/8"-2 1/4" (see Figure 1).
- 3.) Strip the conductor(s) insulation back 3/4"-13/16" (see Figure 1).
- 4.) For a jacketed pair, spread the two conductors apart so that the ends are parallel at approximately 1 3/8" centerline difference (see Figure 2).

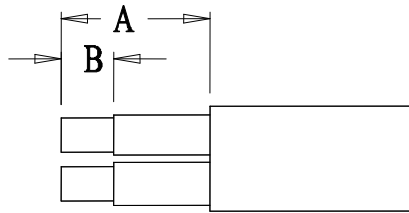

A = STRIP LENGTH: 2 1/8" - 2 1/4"
B = CONDUCTOR STRIP: 3/4" - 13/16"
FIGURE 1

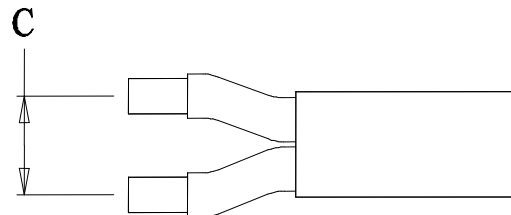

C = CONDUCTOR CENTERLINE: 1 3/8"
FIGURE 2

Wire Installation

- 1.) Remove the main body lid.
- 2.) Remove the strain relief clamp.
- 3.) It may be necessary to loosen (counter clockwise) the wire clamp screw slightly to accept the larger size conductors.

Instructions continued on next page



ASSEMBLY INSTRUCTIONS

Power Block Connector

W.T. Storey Inc.
866-355-0100
www.wtstorey.com

- 4.) Observe polarity and insert the conductors into the center of the individual terminal blocks until the conductor ends contact the back of the terminal block
- 5.) Use a 5/16" hex bit socket to hand tighten (clockwise) the wire clamp screws onto the conductor(s).
- 6.) Finish tightening the terminal block clamp with a torque wrench to 275 inch-pounds (31 Newton Meters).
- 7.) Replace the main body lid.
- 8.) Reinstall the strain relief clamp by alternating the tightening of the three screws to draw the clamp down evenly. The screws should be tightened to approximately 30 inch-pounds.

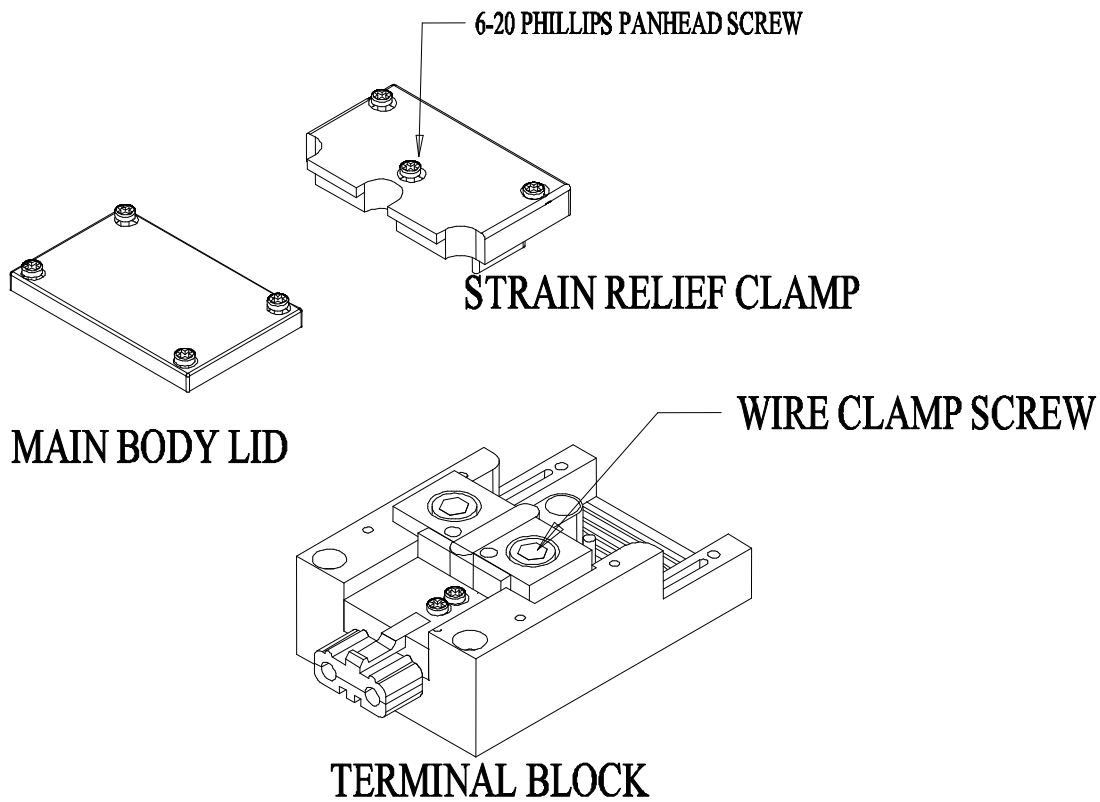


FIGURE 3